


Approve access. Observe the session.

Control who reaches secure assets, when they connect and what they can do. Extend approved sessions through SRA Proxy into supervisory zones.

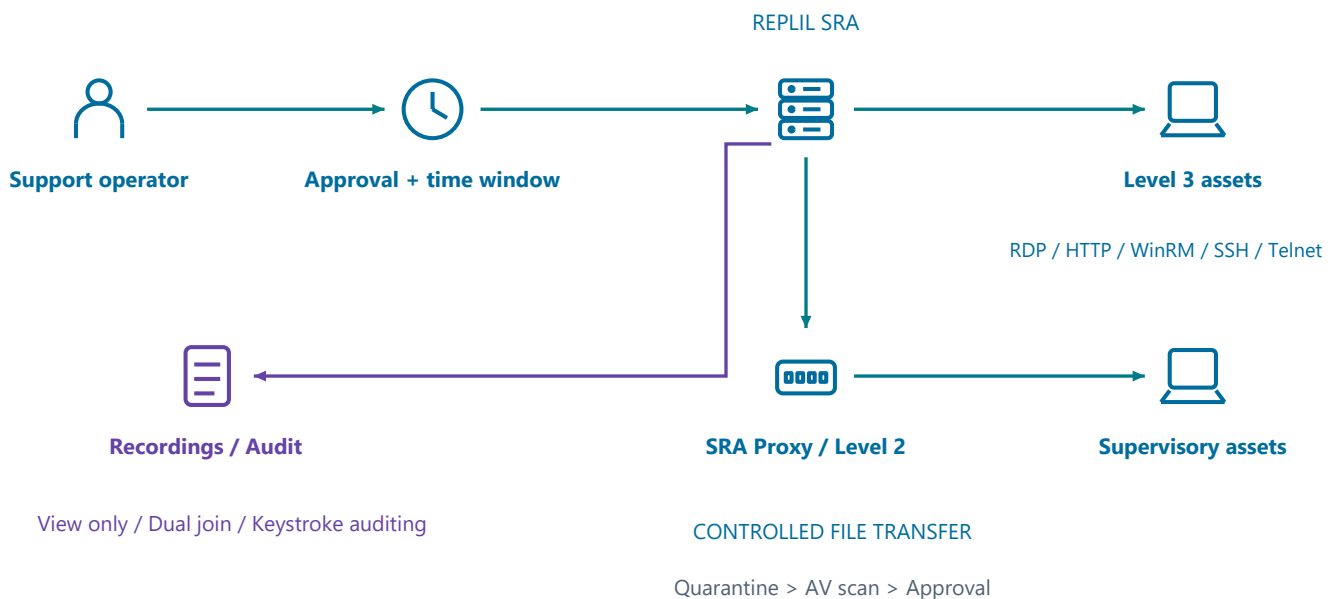

Authorized sessions reach approved assets through defined access paths.

Illustrative workflow. Connections and permissions follow the approved deployment.

PRODUCT WORKFLOWS / KEY CAPABILITIES

01 Approval and time bounds

Authorize the asset, session window and permitted access.

02 Protocol choice

Use supported RDP, HTTP, WinRM, SSH and Telnet workflows.

03 Session evidence

Retain recordings, keystroke auditing and activity trails.

04 Operational oversight

Use view-only or dual-join access and session administration.

The capabilities behind the workflow.

REPLIL SRA - detailed product features



Multiple access protocols

Connect to secure assets using RDP, HTTP, WinRM, SSH, Telnet, and other supported protocols from a controlled access workspace.



Approval-based, time-bound access

Require approval for remote sessions and limit access to an authorized time window.



View-only and dual-join sessions

Provide view-only access when control is not required, or let authorized operators join a session together.



Recorded sessions and audit trails

Keep session recordings, keystroke auditing, and activity trails to support review and accountability.



Controlled file transfer

Move permitted files through central quarantine, antivirus scanning, and configured approval before delivery to the endpoint.



SRA Proxy for supervisory zones

Extend approved REPLIL SRA sessions through an SRA Proxy in the Level 2 zone to supervisory assets, alongside permitted access to Level 3 assets.



Session administration

Give authorized operators the tools to oversee, join, control, and disconnect active sessions.

Make the workflow fit the facility.



- Approved maintenance access**
 Authorize a time-bound session to a permitted Level 3 asset and retain the activity trail.
- Supervisory-zone access**
 Use SRA Proxy inside the isolated Level 2 zone to reach local supervisory assets through the approved conduit.
- Observed vendor assistance**
 Use view-only or dual-join access for supervised troubleshooting.

MINIMUM DEPLOYMENT RESOURCES

CPU	RAM	STORAGE
4 vCPU	16 GB minimum	200 GB SSD + recordings

SRA Proxy: 4 vCPU and 16 GB RAM. It is separate from IPM Proxy. Size recording and session-data storage for the deployment.

Windows Server x64 / PostgreSQL / native gateway

BUILT FOR CRITICAL INFRASTRUCTURE



Oil & gas



Energy & utilities



Manufacturing



Water



Smart cities



Transport

Explore your deployment with REPLIL.

replil.com / sales@replil.com